


Chalk It Up Pool ::: DBA Pool Table Update

Removing Old Parts and Installing New Board

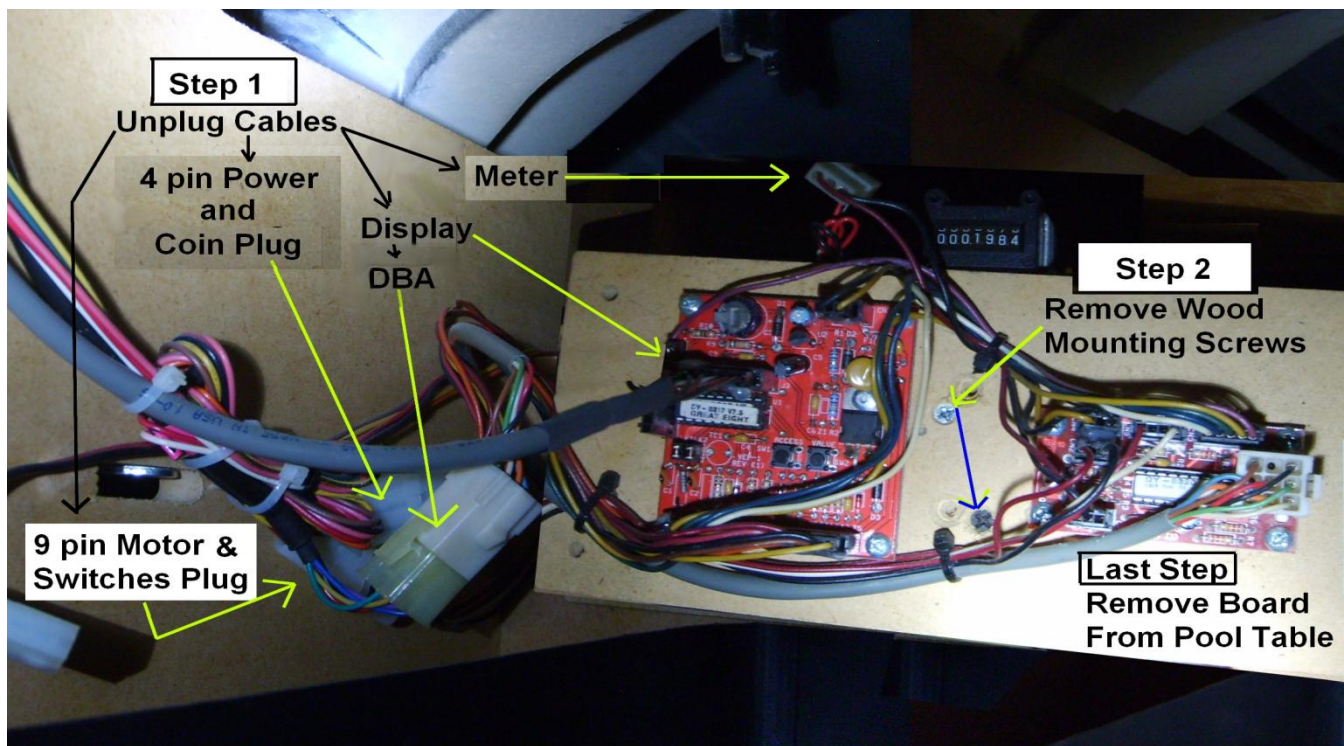

Removing Parts From Old Board


Step 1: Using a sharp knife run the tip down between the connector and the hot glue. Work the knife back and forth while pulling on the connector wires until the connector is free.

Step 2: Cut wire ties as needed to release wires from board.


Step 3: Remove Integrated Circuit (IC) from board Using the same narrow bladed knife as before. Insert knife point under IC and carefully pry up one end, then using fingers remove the IC the rest of the way.

Step 4: Remove 4 screws holding the PCB board to the wood. Save screws and spacers for installation onto new board.


Step 5: Remove board with all the wires attached for installation to new wood and PCB board.

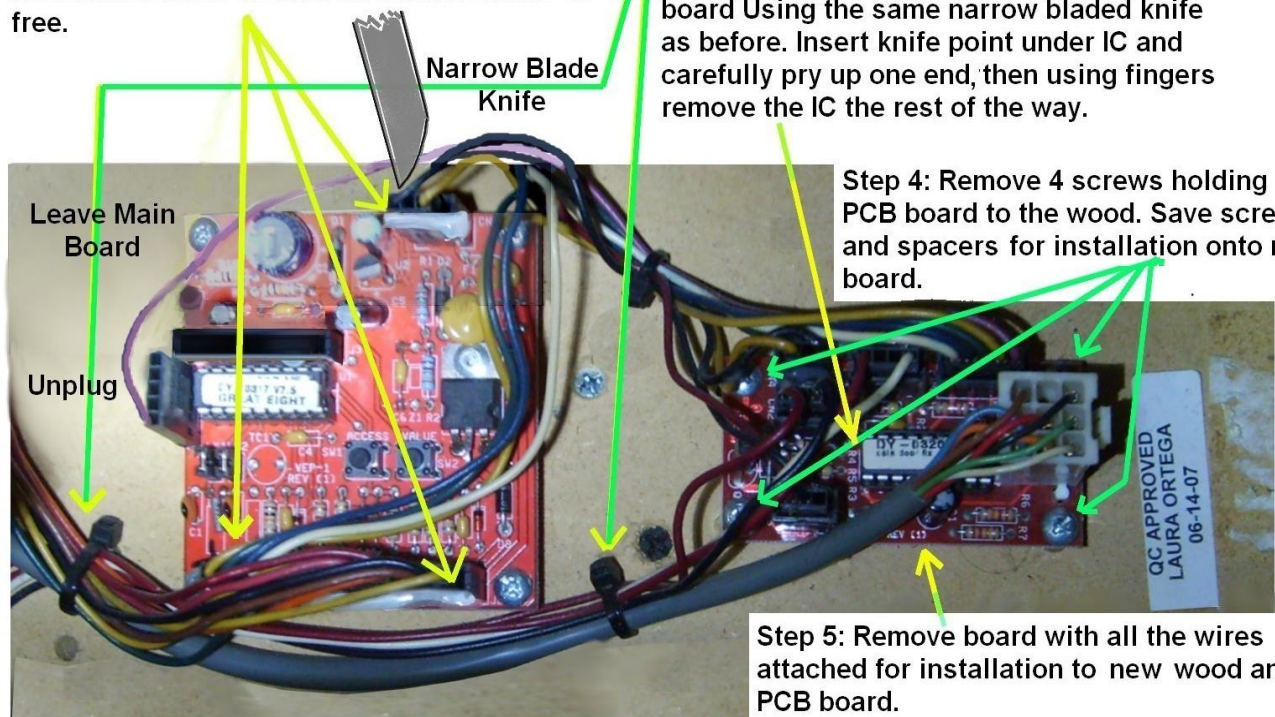

Installing Parts to New Board

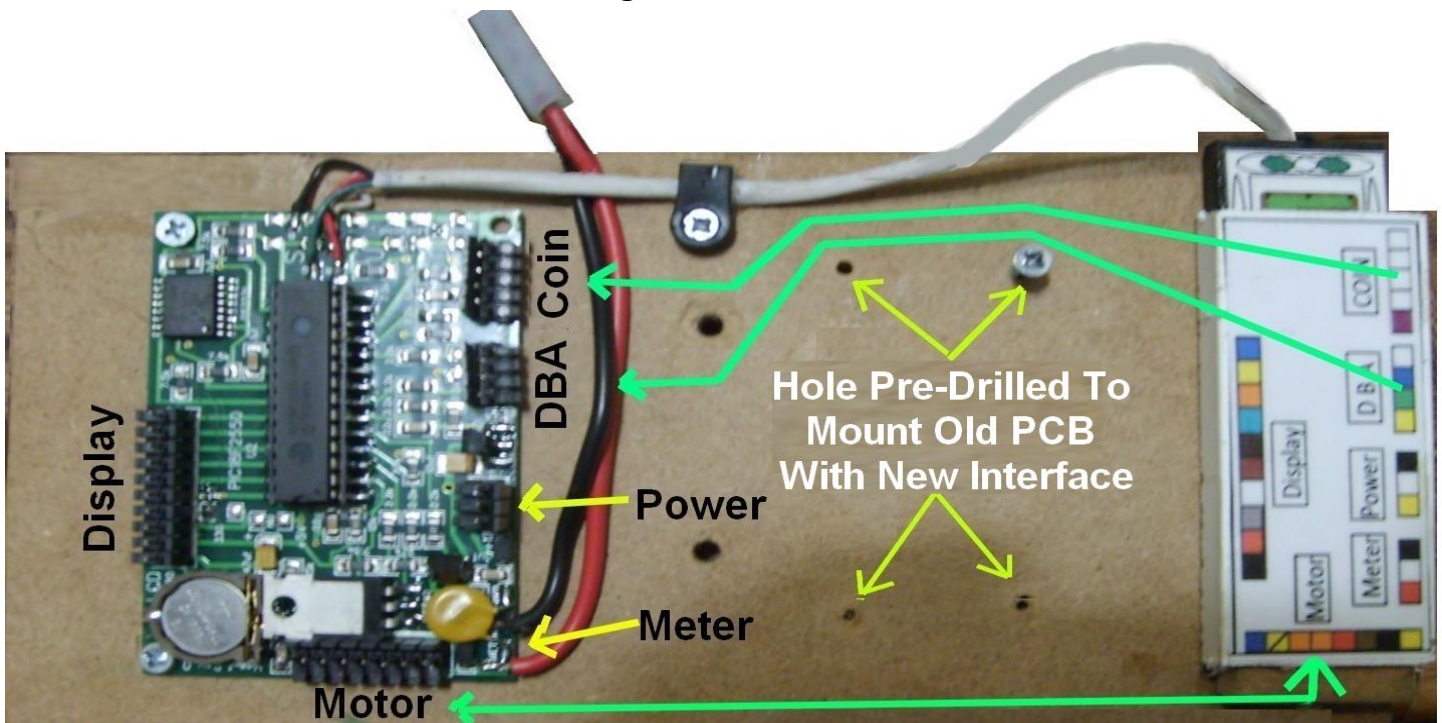


Install Jumper Board in IC Socket. NOTE: Cables Removed for Clarity.

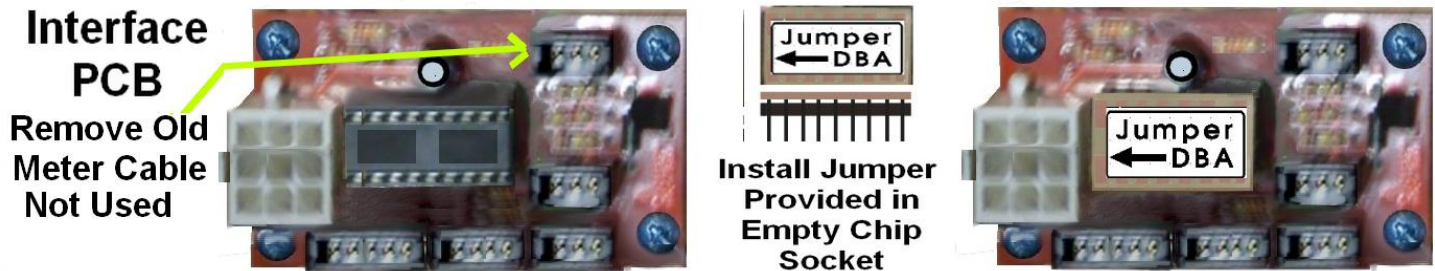



Mount Interface Board and Connect Cables

Plug Wire From Old Board to New Board as Shown.

All Color on Connectors Listed Here

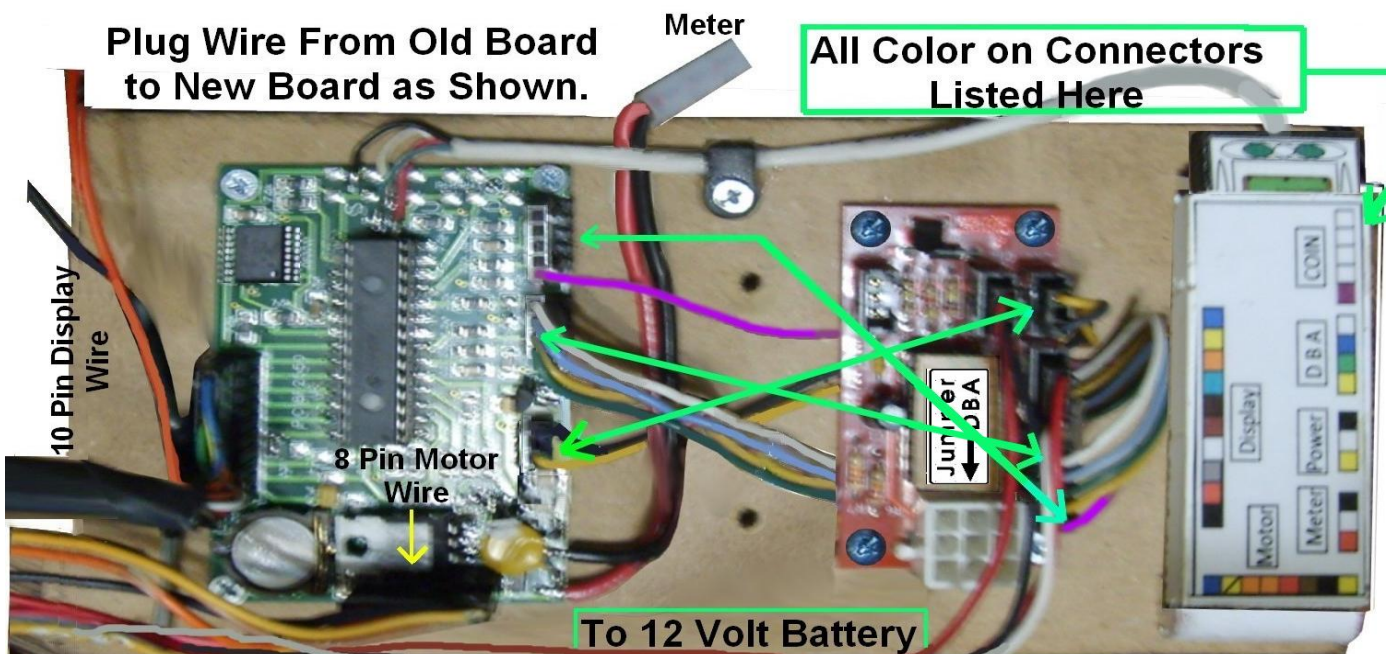

Installing Back Into Pool Table

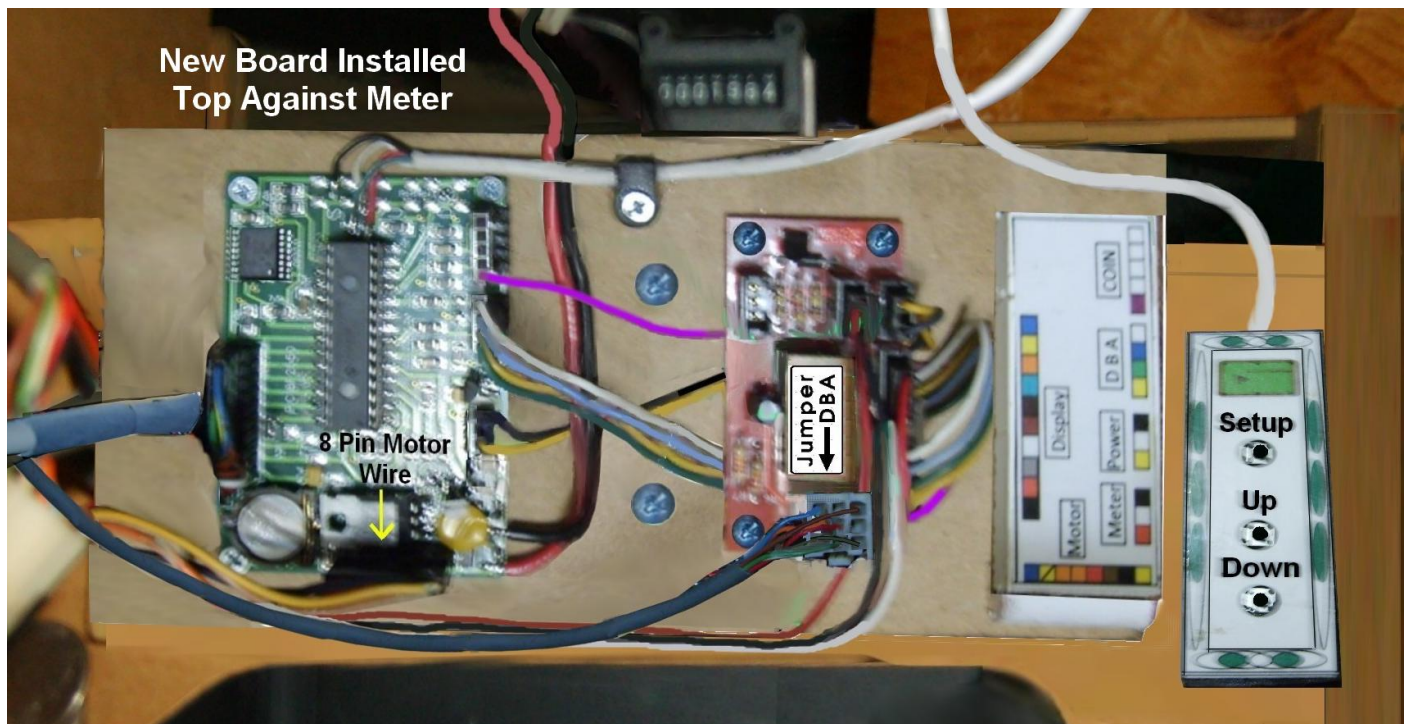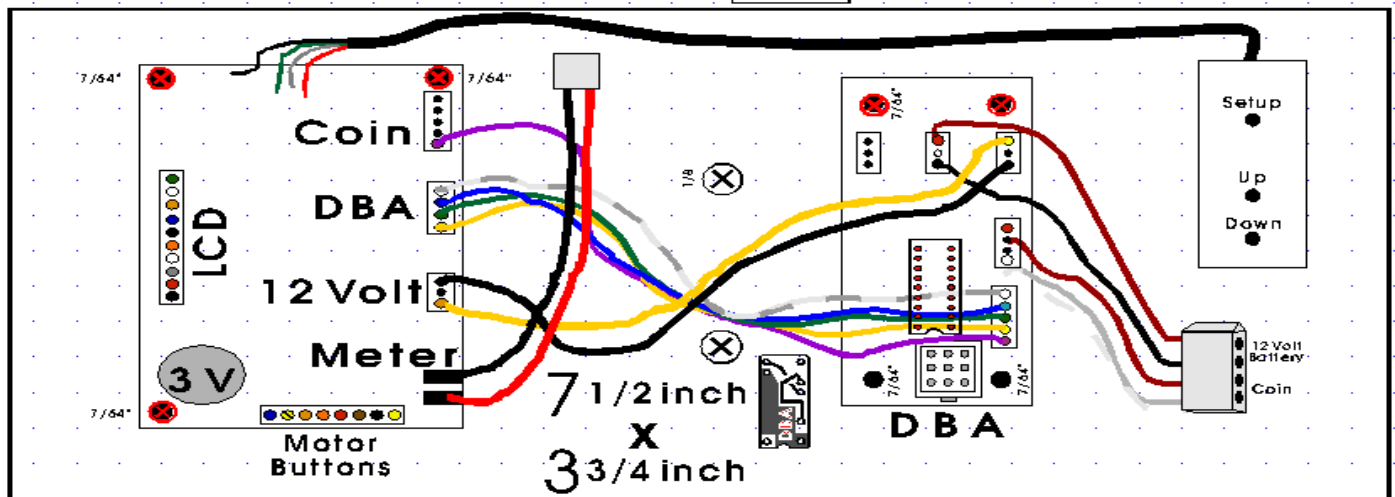

See Setup Instructions Next

Website <http://www.cputablesaw.com/>